



TECHNICAL SHEET

FLOAT LEVEL DETECTOR


TUBA 1''



VR: Emptying / Filling

Technical characteristics :

Operating mode	: omnidirectional
Maximum pressure	: 5.5 bars
Protection index	: IP68
Standardized cables	: Neoprene 3 x 0.75 mm ²
Allowed fluid density	: 0.75 to 1.50
Maximum temperature	: 85°C
Cylindrical shell	: copolymer polypropylene
Cut-out power	: 10 (2) A (10 A resistive – 2 A inductive)
Power supply	: 250 VAC - 50 / 60 Hz
Reverser microswitch	: silver / nickel contacts
Adjustable ballast on cable	: loaded resin 175 g (optional)
Float weight without cable	: 61 g
Cable weight	: 48 g/m
Standard cable lengths	: 2, 3, 5, 10 and 20 m, specific lengths on request

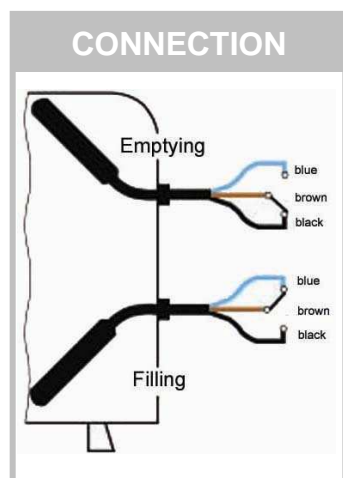

Appliances:

Level detections of industrial liquids in tanks, cisterns, reservoirs and others...
Ideal equipment for ALARM function.

