

Inclinometers

**Inclinometer
MEMS / capacitive**

IS60, 2-dimensional

CANopen



The inclinometer IS60 permits 2-dimensional inclinations to be measured. Versions are available for the measuring ranges $\pm 10^\circ$, $\pm 45^\circ$ or $\pm 60^\circ$.

The sensor has a standardised CANopen interface, which enables easy configuration and start-up. All the parameters are stored in the internal permanent memory.

Can be supplied with customer-specific parameterising.



CANopen



High protection level



Shock / vibration resistant



Reverse polarity protection

Robust and reliable

- Protection rating IP68
- Robust plastic housing
- High shock resistance

User-friendly and accurate

- High resolution and accuracy
- Programmable vibration suppression
- High sampling rate and bandwidth

Order code Inclinometer IS60

8.IS60 . 2X523
Type

a Measuring direction
2 = 2-dimensional x/y

b Measuring range
1 = $\pm 10^\circ$
2 = $\pm 45^\circ$
3 = $\pm 60^\circ$

c Interface
5 = CANopen

d Power supply
2 = 10 ... 30 V DC

e Type of connection
3 = 2 x M12 connector

Connection technology

Order No.

Connector, self-assembly (straight)

M12 female connector with coupling, Bus in
M12 male connector with external thread, Bus out

05.B-8151-0/9

05.BS-8151-0/9

Cordset, pre-assembled

M12 female connector with coupling, 6 m [19.69'] PVC cable, Bus in
M12 male connector with external thread, 6 m [19.69'] PVC cable, Bus out


05.00.6021.2211.006M

05.00.6021.2411.006M

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories

Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology

Direction of inclination

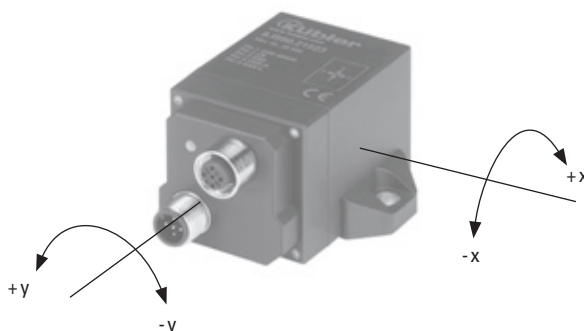

Inclinometers

Inclinometer MEMS / capacitive	IS60, 2-dimensional	CANopen
---	----------------------------	----------------

Technical data

Mechanical characteristics	
Connection CAN	M12 connector, 5-pin
Weight	approx. 0.2 kg [7.06 oz]
Protection acc. to EN 60529	IP68
Working temperature range	-40°C ... +80°C [-40°F ... +176°F]
Material	plastic PA12-GF30
Shock resistance	30 g, 11 ms
Vibration resistance	55 Hz, 1 mm [0.04]
Dimensions	68 x 42.5 x 42.5 mm [2.68 x 1.67 x 1.67"]

Electrical characteristics	
Power supply	10 ... 30 V DC
Power consumption (no load)	40 ... 105 mA
Reverse polarity protection (+V)	yes
Measuring axes	2 (x/y)
Measuring range	± 10°, ± 45°, ± 60°
Resolution	0,1°
Linearity deviation	max. ± 0.4 °
Calibration accuracy – at 25°C [77°F]	± 0.1° (Zero point and final values)
Temperature drift (Zero point)	typ. ± 0.008°/K
Sampling rate	100 Hz
CE compliant acc. to	EN 61326-2-3 EMC requirements for transducers
RoHS compliant acc. to	guideline 2011/65/EU

Interface characteristics CANopen	
Interface	CANopen according to CiA DS-301, Profile to CiA DSP-410
Data rates	10 kbit/s, 20 kbit/s, 50 kbit/s, 125 kbit/s, 250 kbit/s, 500 kbit/s, 800 kbit/s, 1 Mbit/s
Functions	TPDO (RTR, cyclic, event-driven, synchronized), parameterization per SDO and object register, digital filter (Butterworth Low pass, 8th order), SYNC Consumer, EMCY Producer, output and control of internal device temperature (±2.0 K accuracy), failure control with the help of Heartbeat or Nodeguarding / Lifeguarding
Note ID	1 ... 127

A full description of the technical data can be found in the relevant product manual at www.kuebler.com.

Terminal assignment

PIN	Signal	Assignment
1	CAN_SHLD	Shield
2	CAN V+	Power supply (+24 V DC)
3	CAN_GND	0 V
4	CAN_H	CAN_H Bus cable
5	CAN_L	CAN_L Bus cable



Dimensions

Dimensions in mm [inch]

